


# Certificate of Analysis

Polymer type: Poly(styrene sulfonate) sodium salt  
 Part No: PSS-pss1m  
 Lot No: pss14052-3w

## Molar Mass Distribution

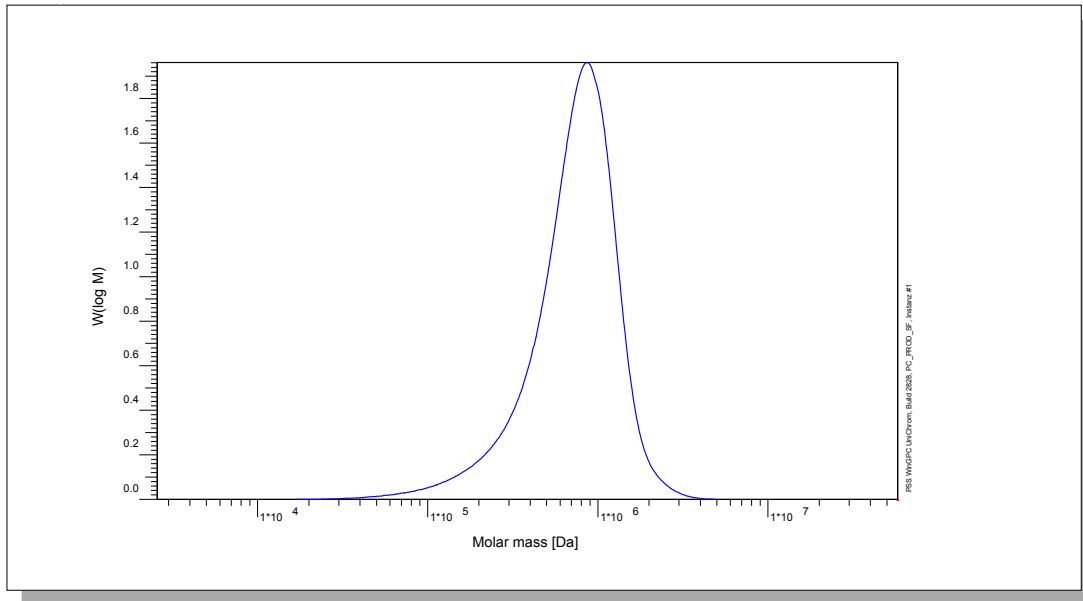

## GPC/SEC - Conditions

Sample concentration	1,00 g/l	Inject volume	20 µl
Flow rate	1,00 ml/min	Temperature	23 °C
Solvent	Water, Disodium hydrogen phosphate 11,88g/L		
Precolumn [8 x 50 mm]	PSS MCX 10µm		
Columns [analytical, each 8 x 300 mm]	PSS MCX 10µm 10e3A / 10e5A / 10e7A		
Data Acquisition Software	PSS WinGPC	Operator	S.Fugmann

## GPC/SEC - Results

Detector	Mw [Da]	Mn [Da]	Mp [Da]	PDI [Mw/Mn]
Agilent VWD 254nm	976000	-	976000	<1.20

Parent Poly(styrene) Molecular Weight: Mw [Da] = 519 000 Mn [Da] = 474 000 Mp [Da] = 519 000 PDI = 1.09

### Note:

Mw = Weight average molecular weight  
 Mn = Number average molecular weight  
 Mp = Molar mass at the peak maximum  
 PDI = Polydispersity Index

The molecular weights are calculated with the factor 1.88 ( pss sodium salt / ps x 0.95 ). Degree of sulfonation > 90%.  
 (For calculation: Assumption: Degree of sulfonation is 95%).

**Storage:** Store the tightly recapped polymer standard in a dry, dark, cool area; e.g. a refrigerator (4 °C).

**Date of expiry:** See product label.

Manufacture and control according to PSS method of analysis



Dr. T. Hofe  
 production director