


Certificate of Analysis

Polymer type: Poly(methyl methacrylate)
 Part No: PSS-mm55k
 Lot No: mmg5125

Molar Mass Distribution

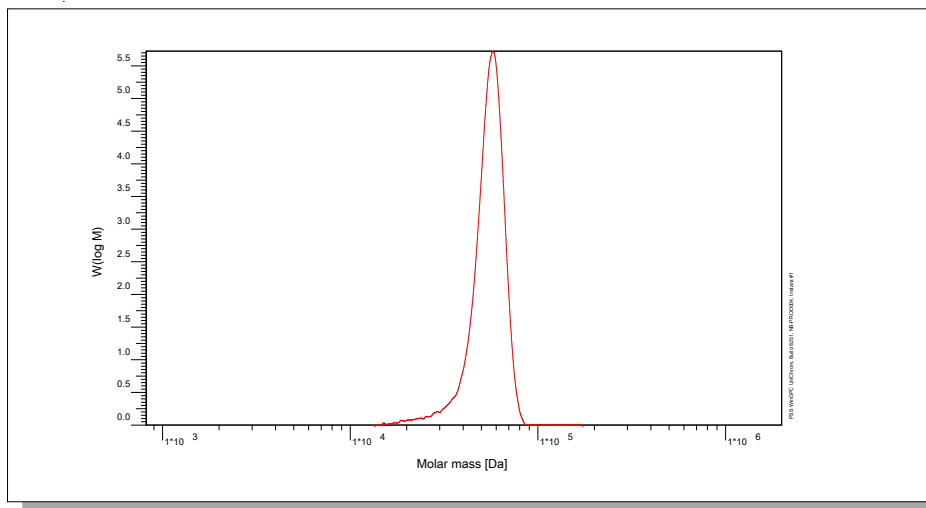

GPC/SEC - Conditions

Sample concentration	1,00 g/l	Inject volume	20 µl
Solvent	THF	Flow rate	1,00 ml/min
Precolumn [8 x 50 mm]	PSS SDV 5µm	Temperature	23 °C
Columns [analytical, each 8 x 300 mm]	PSS SDV 5µm 10e3Å / 10e5Å / 10e6Å	Operator	J.Preis
Data Acquisition Software	PSS WinGPC		

GPC/SEC - Results

Detector	Mw [Da]	Mn [Da]	Mp [Da]	PDI [Mw/Mn]
PSS SECcurity RI	57800	55900	58700	1,03

Additional Methods - Results

Method	Mw [Da]
Light Scattering, on-line (SLD7x00)	53300


Mw = Weight average molecular weight
 Mn = Number average molecular weight
 Mp = Molar mass at the peak maximum
 PDI = Polydispersity Index

Light Scattering run on-line, based on Toluene Rayleigh Ratio $R = 1.404 \cdot 10^{-5} \text{ cm}^{-1}$ at 633 nm.
 System and instrument validation based on Certified Reference Materials Poly(styrene) Lot No: ERM-FA001.

Sample concentration 3.9005 g/L
 Inject volume 100µL
 Sample dn/dc 0.087mL/g

Storage: Store the tightly recapped polymer standard in a dry, dark, cool area; e.g. a refrigerator (4 °C).
Date of expiry: yyyy/mm/dd (See also product label.)
Date of approval: yyyy/mm/dd

Manufacture and control according to PSS method of analysis


 Dr. T. Hofe
 production director

